




PLOWMAXX JR

PLSO



PLjr

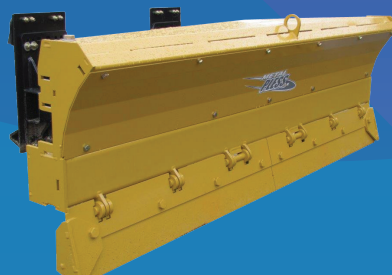

PRODUCT FEATURES :

- Adjustable angulation of the blade
- "Heavy duty" CHT400 steel cutting edge $\frac{1}{2}$ " x 6" (Std)
- Full tripping system of the blade (PLjr models, Std)
- "Heavy duty" multi-section mechanical trip edge $\frac{1}{2}$ " x 6" (PLSO models, Std)
- **SOFT drive** mechanical steel trip edge, "Heavy duty" multi-section $\frac{1}{2}$ " x 6" (HD)
- Mobile steel trip edge following the imperfection of roads, exclusive Metal Pless system, **reduces up to 50% the use of salt and abrasives (LE)**
- Carbide cutting edge (LE)
- Adjustable crossover relief valve for hydraulic protection
- Lateral floating of the blade
- Baked powder paint
- This system requires 1 set of oil outlets

OPTIONS :

- Teflon cutting edge $\frac{3}{4}$ " x 6"
- Carbide cutting edge
- Non standard colour
- Quick attach

LIVEEDGE

Model	Width	Height	Application	Approx. weight
PLjr525	5'	25"	30 - 40 HP	460 lbs
PLjr625	6'	25"	30 - 50 HP	500 lbs
PLjr725	7'	25"	40 - 60 HP	560 lbs
PLjr825	8'	25"	50 - 70 HP	635 lbs
PLSO730	7'	30"	60 - 70 HP	925 lbs
PLSO830	8'	30"	70 - 80 HP	975 lbs
PLSO930	9'	30"	80 - 90 HP	1025 lbs
PLSO1036	10'	36"	80 - 100 HP	1650 lbs
PLSO1236	12'	36"	100 HP & up	1950 lbs
PLSO1242	12'	42"	125 HP & up	2375 lbs

PLOWMAXX JR

The width of the blade does not determine the real dimension of the product. Pictures might show options.