





PRODUCT FEATURES :

- 180° multiple hydraulic side wing positions
- Side wings made from "Heavy duty" steel CHT400
- Reinforced rubber edge ¾" x 6"
- 3 adjustable crossover relief valves for hydraulic protection on the side wings and power angle system if applicable
- Self-leveling rubber abrasion shoes on the wings
- Lateral floating of the blade
- Baked powder paint
- This system requires 2 to 3 sets of oil outlets

OPTIONS :

- Non standard colour
- Adjustable angulation of the blade
- Universal subframe exclusive to Metal Pless
- Electric valve and joystick, eight (8) button joystick and electric valve (operate all 8 functions by the press of a button, electric over hydraulic mounted on blade with electric control and necessary cable for the installation in the cab)
- Nitrogen accumulator package installed on the up and down cylinder
- Quick attach
- 3 point hitch attachment

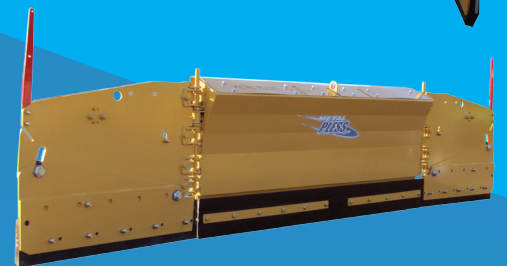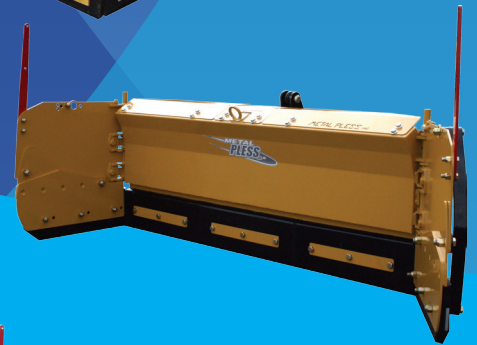

Some basics variations on blade positions



Model	Blade position & width			Height & width of the side wings	Application	Approx. weight
	Box	Scoop	Extended			
RBX0626-11	6'	8'6"	11'	26" x 30"	40 - 60 HP	900 lbs
RBX0730-13	7'	10'	13'	30" x 30"	50 - 80 HP	1350 lbs
RBX0736-14	7'	10'6"	14'	36" x 42"	60 - 90 HP	1450 lbs
RBX0836-15	8'	11'6"	15'	36" x 42"	90 - 125 HP	1550 lbs



Reinforced rubber edge



3 points hitch attachment



Different types of quick attach available

The width of the blade does not determine the real dimension of the product. Pictures might show options.

RUBBERMAXX