

PRODUCT FEATURES :


- Blade without pivot (no angle) with two hydraulic side wings
- 180° multiple hydraulic side wing positions
- Side wings made of "Heavy duty" steel CHT400
- "Heavy duty" CHT400 steel multi-section mechanical trip edge ½" x 6" (Std)
- **SOFT drive** mechanical steel trip edge, "Heavy duty" multi-section ½" x 6" (HD)
- Mobile steel trip edge following the imperfection of roads, exclusive Metal Pless system, **reduces up to 50% the use of salt and abrasives (LE)**
- Carbide cutting edge on main mouldboard only (LE)
- 2 adjustable crossover relief valves for hydraulic protection on the side wings
- Wings have self-leveling abrasion shoes made of CHT400 steel
- Wear plate welded to the skid shoes on the side wings (Std)
- **SOFT drive** mechanical steel trip edge on the wings (HD/LE)
- Lateral floating of the blade
- Electric double valve selector installed on the blade (DVDE2) 12 or 24 volts
- Baked powder paint
- This system requires 1 set of oil outlets



OPTIONS :

- Silage application (includes deflector and hydraulic tilt)
- Teflon cutting edge ¾" x 6"
- Carbide cutting edge
- Curb runners
- Non standard colour
- Quick attach

LIVE EDGE

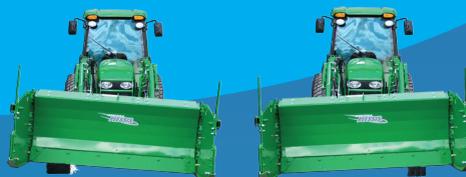

Model	Blade position & width			Height & side gate width	Application	Approx. weight
	Box	Scoop	Extended			
REVL0526-10	5'	7'6"	10'	26" x 30"	35 - 45 HP	800 lbs
REVL0626-11	6'	8'6"	11'	26" x 30"	45 - 55 HP	870 lbs
REVL0726-12	7'	9'6"	12'	26" x 30"	55 - 65 HP	950 lbs
REVM0630-11	6'	8'6"	11'	30"	50 - 60 HP	1390 lbs
REVM0730-12	7'	9'6"	12'	30"	60 - 80 HP	1625 lbs
REVM0830-13	8'	10'6"	13'	30"	70 - 90 HP	1887 lbs
REVM0736-13	7'	10'	13'	36"	60 - 90 HP	1900 lbs
REVM0836-14	8'	11'	14'	36"	80 - 100 HP	2000 lbs
REVM0936-15	9'	12'	15'	36"	90 - 125 HP	2090 lbs
REVM0836-16	8'	12'	16'	36" x 48"	85 - 125 HP	2085 lbs
REVM1036-16	10'	13'	16'	36"	100 - 125 HP	2190 lbs
REVM1236-18	12'	15'	18'	36"	125 HP & up	2300 lbs
REVM1242-19	12'	15'6"	19'	42"	125 HP & up	2500 lbs

REVERSEMAXX

The width of the blade does not determine the real dimension of the product. Pictures might show options.